HUSHCORE ENGINEERED VINYL PLANK

CODALT

High Performance Core | Attached Acoustical Backing

HushCore's high performance construction and protective Cobalt Guard finish provides superior resistances to scratching, scuffing, and indentations while helping hide minor substrate irregularities. With a LIFETIME residential warranty and a 10-year commercial warranty, HushCore is the perfect solution for your flooring needs.






























HUSHCORE ENGINEERED VINYL PLANK

CODALT

High Performance Core | Attached Acoustical Backing

TECHNICAL

ASTM E648-06 Critical Radient Flux ASTM E662 Smoke Density

ASTM F925 Stain and Chemical resistance

ASTM F970-07 Static load limit

ASTM F1514 Heat Stability by measuring color change
ASTM F1515 Light stability by measuring color change
ASTM F2199 Dimensional stability after heat exposure
ASTM E90/ASTM E492 Acoustical rating – 6" Concrete (No Ceiling)

Additional Sound Testing Acoustical rating – 6" Concrete (With Ceiling)

Class 1

<450 sdi/Passes Excellent

.001" @ 250 lbs.

Very slight Very slight

< 1% change

IIC 65, STC 60



FEATURES/BENEFITS



- Limited lifetime residential wear warranty
- HPC High Performance Core that is waterproof and provides superior dimensional stability
- Attached cork acoustical backing provides superior sound control performance
- NovaClic FD® Floating Installation System provides a no-adhesive needed quality installation a with Micro-Bevel visual
- Cobalt Guard is an enhanced polyurethane protective coating
- FloorScore® Certified

PACKAGING


Size: Nominal 7" x 48" Planks

Gauge: 6mm Wear Layer: 12mil

Carton Qty: 10 pieces per carton

(23.2 sq ft)



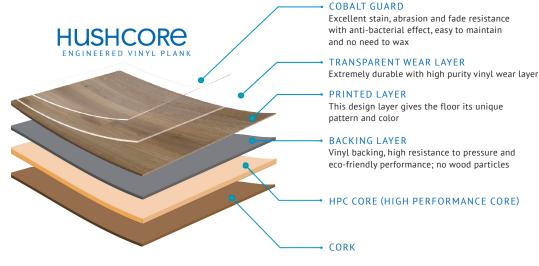

WATERPROOF, SCRATCH RESISTANT, AND SUPERIOR DIMENSIONAL STABILITY -

HushCore provides it all in one great looking package. HushCore's High Performance Core (HPC) is constructed with first quality virgin vinyl materials that provide a rigid and waterproof core. Add to that Hushcore's attached acoustical cork backing and you have the complete package when sound control, resistance to scuffing and scratching, and the ability for quick and consistent installations are needed.

^{*20}mil wear layer option available by request