

## SPC WITH PATENTED TRUE GROUT® TECHNOLOGY

Introducing Velaris SPC Grouted Tile by Cobalt Surfaces, a revolutionary high-performance flooring solution featuring patented TrueGrout® technology. The SPC planks offer unprecedented durability and features an innovative grout line in the center of the plank, mimicking the appearance of two tiles in one. The grout line allows for the creation of numerous patterns without the added time and cost of grouting. The TrueGrout® “Shield” ensures consistent grout line color by resisting stains, offering not just aesthetic appeal but also longevity. Elevate your space with Velaris SPC with patented TrueGrout® technology, where innovation meets enduring style.



Esquiline Stone

V620-300



Roman Mortar

V620-301



Tuscan Storm

V620-302



Eternal Bronze

V620-303



Ionic Stone

V620-304



Medieval Sand

V620-305



Belvedere Metal

V620-306



Palatine Tuff

V620-307



Caelian Cloud

V620-308




Gladiator Iron

V620-309



UV Cured Polyurethane  
20mil Wear Layer  
High Resolution Design Layer  
True Grout Shield  
SPC (Stone Polymer Composite)

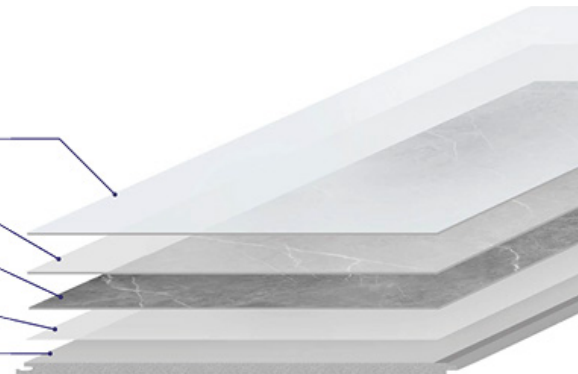

## TECHNICAL

ASTM F925	Resistance to Chemicals	No Change
ASTM F1514	Resistance to Heat	Average 0.64
ASTM F1515	Light Stability	Average 0.56
ASTM F1914	Residual Indentation	.03mm
ASTM F2199	Dimensional Stability	Curling 0.001 in
ASTM C1028	Static Coefficient of Friction	Dry-0.89, Wet-0.73
ASTM E648	Critical Radiant Flux	1.06
ISO 1518-1	Scratch Resistance	Horizontal-No visible scratch on wearlayer, no penetration to print film; Vertical-Visible scratch on wear layer, no penetration to print film
ASTM E662	Smoke Density	Specimen intumesced at about the 1:30 minute mark and began to produce white smoke. Specimen ignited after about 5 seconds with bright orange flames 4-5 inches high. Flames went out at about the 5:15 minute mark.
ASTM E492 & E989 with 6" slab	Impact Sound Reduction (IIC)	54
ASTM E90 & E413 with 6" slab	Sound Transmission (STC)	53
ALFA Castor Chair - modified	Castor Chair w/ Underlayment	No Damage

## FEATURES/BENEFITS

- Velaris SPC offers a 15-year commercial warranty
- Lifetime residential wear warranty
- TrueGrout® technology revolutionizes flooring
- Stone composite is waterproof and provides superior durability
- Attached acoustical backing provides superior sound control performance
- TrueGrout® Shield is resistant to stains and ensures grout line color consistency
- Floorscore Certified

## PACKAGING

Size	Plank Size 12"x48" (Nominal) with 3mm Shielded Grout Line
Gauge	6mm (5mm +1mm IXPE pad)
Wear Layer	20 Mil Wear layer
Method of Install	Floating - Click System (Angle/Drop)
Carton Qty	6 Planks Per Carton
Item/Color Identifier	V620-###